


### Control Side

Your blind will come with the controls on the side you requested, however, if you'd like to swap to the other side, the controls can be removed by simply unplugging them from the tube. This should be done prior to installing the brackets.


1

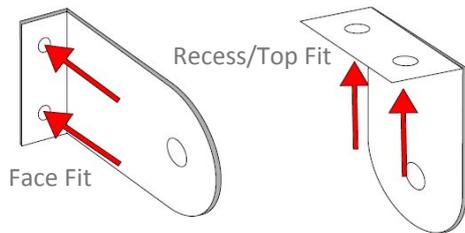

### The Brackets

The brackets supplied with your blind enable you to face-fix the blind onto a wall/architrave, or top-fix the blind onto the underside of a recess.


2

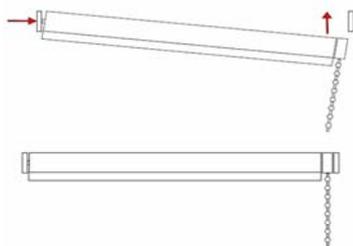

### Installing your blind

Once the brackets have been fitted to the window area, locate the 'pin' (the end of the blind opposite to the controls) into the bracket first. Then fix the control end into the opposite bracket.

3

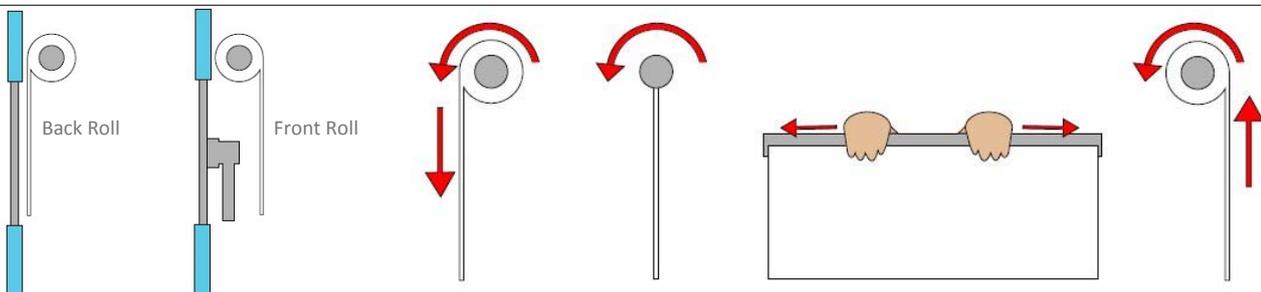

4


Roller blinds can have the fabric rolled onto the tube in two directions. The first is referred to as a 'Back Roll'. This will place the fabric closest to the window or wall so that it comes down at the back of the tube. This is typically used with blackout blinds when they are mounted outside of a recess, the back roll meaning that there is less light leakage.

The second method is referred to as a 'Front Roll', this places the fabric so that comes down at the front of the tube. This will allow clearance for window handles and other obstructions if you mount the blind inside a recess.

If you wish to change the roll direction, unroll the fabric fully so that you can see the aluminium tube. Keep turning the tube in the same direction so that the fabric starts to roll up on the opposite side. Run your hands along the fabric to loosely form a fold so that the fabric sits closer to the tube and continue rolling the fabric back up.



Max distance possible (ensuring chain/cord is fully taut)

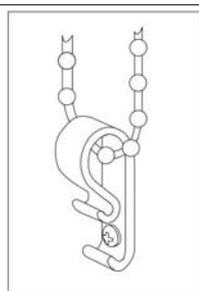

### Child Safety Device

The cord retaining device must be installed at the maximum distance possible from the control mechanism to prevent looped cords becoming slack.

Place the retaining device on the wall and mark the position of the hole using a pencil.

Attach the retaining device using suitable fixings ensuring the device is fully closed.

5