



1

Positioning the brackets




The position that you place the outer most brackets must be 9cm away from the end of the rail. Any additional brackets (supplied for wider blinds) can then be evenly distributed across the rest of the window space. Use a pencil to mark the window area where the brackets will be positioned.




Ensure that the back of the bracket sits clear of any protruding items such as window handles or window vents. This will allow the blind to hang correctly once installed.

2

Fitting the brackets




Use the hole at the rear of the bracket for mounting the bracket onto the facing wall or window frame




Use the hole on the top of the bracket for fixing to the ceiling or the underside of a recess.

3

Fitting the blind

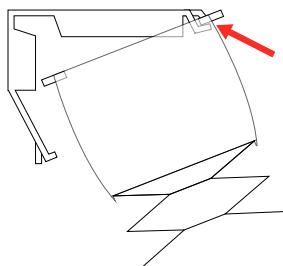


Situate the front lip of the head rail into the front section of the bracket.

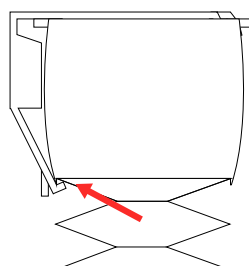


Push the back of the head rail upwards to engage the metal clip at the back of the bracket.

4

Additional Information

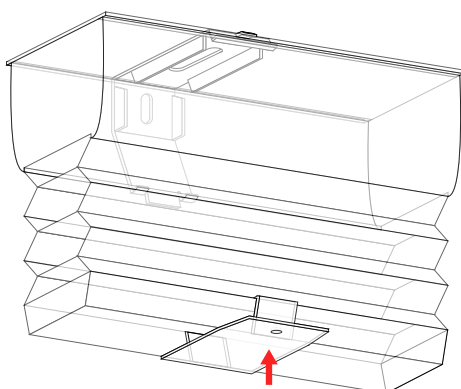

Fitting the handle is optional. To attach it to the bottom-bar of the blind, position the handle in the centre of the bottom bar with the rear tab resting on the top edge of the bar. Press the handle firmly upwards so that the front tab clicks into place.

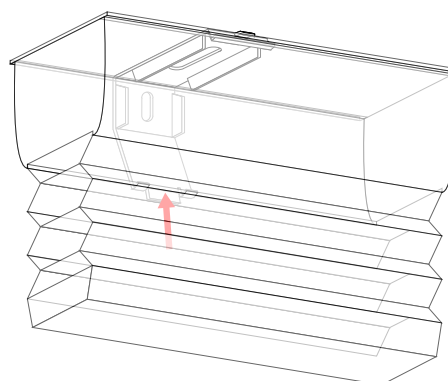

To release the blind from the brackets, insert a flat-head screwdriver into the gap between the bottom of the bracket and the rail. Then prize the bracket back by gently pushing the screwdriver towards the window. The bracket will then release the rail.