BLINDS ONLINE. COM.AU

Retro Motor
Installation. Easy.

AUSTRALIAN MADE

Installing your motor into your blind:

Start by sliding the chain drive out of your blind and store it in a safe place. When sliding your motor into your blind ensure that the teeth of the tube line up with the key hole of the crown and wheel.

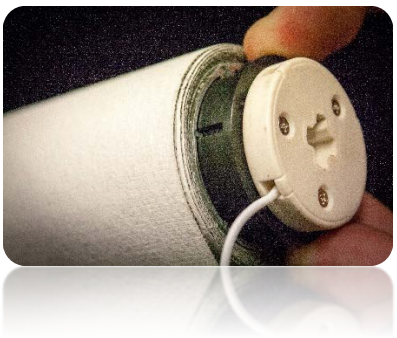

Link the remote to the motor:

Using a sharp point, press and hold the button on the motor for 5 seconds until the red light stays lit.

Choose the channel on the remote you would like the motor to be programmed to.

For further information please contact our customer service team Monday to Friday 9am to 5pm **Phone:** 1300 761 179 or **Email:** sales@blindsonline.com.au

Choose. Measure. Order. Install. Easy.

Using a sharp point, press the button on the back of the remote to confirm the channel.

Finally press the button on the motor to finalise. The light on the motor will turn off once the button has been pressed.

Set the up limit:

Using a sharp point, press and hold the button on the back of the remote simultaneiously with the 'up' button. Hold them both down until the motor quivers or the light on the motor flashes.

Bring the blind up to your desired height using the up button. To finalise this limit, using a sharp point, press the button on the back of the remote for 5 seconds.

Set the down limit:

Using a sharp point press and hold the button the back of the remote simultaneiously with the down button. Hold them down until the motor quivers or the light on the motor flashes.

Bring the blind down to the desired position using the down button. To finalise this limit, using a sharp point, press the button on the back of the remote for 5 seconds.

BLINDS ONLINE. COM.AU

Retro Motor
Installation. Easy.

AUSTRALIAN MADE

Handy Hints:

Changing the motor Direction:

If the motor is rotating in the opposite direction, using a sharp point, press and hold the button down on your motor for 3 seconds.

Then press and hold the stop button and the first channel select button. The motor will then quiver.

To finalise this process, using a sharp point, press and hold the button down on the motor for 3 seconds.

Delete Limit Settings:

Press the stop button on the remote and the button on the back of the remote simultaneously for 4 seconds until the roller blind quivers. This will delete the limit settings.

Delete Remote Control Settings:

If you need to make the already set channels invalid, please execute the below.

Press the button on the motor for 3 seconds and release. Then press the button on the motor for a further 7 seconds this will delete the remote control channels.